

<u>CPC DRAWINGS</u>

SMFA 4PLEX - ADDITION / RENOVATION

7229 Zimpel St. New Orleans LA, 70118

	KEYNOTES - SHEET
Key Value	Keynote Text
N-01	EXISTING ROOF RECENTLY REPLACED. PROVIDE BATT INSULATION AT ATTIC CEILING AND CONDITION ATTIC AS REQ'D FOR IECC REQUIREMENTS. RE: MEP.
N-02	RIDGE VENT AT ROOF, TYP.
N-08	NEW PERVIOUS PAVERS THIS LOCATION
N-09	NEW GRADING/SOD AS REQ'D.
N-12	6" ALUMINUM BAKED HALF ROUND STYLE GUTTERS CONNECTED TO ALUMINUM ENAMEL BAKED 4" CIRCULAR DOWNSPOUTS BELOW, TYP. FOR ALL INSTANCES. TYP. FOI ALL INSTANCES. PROVIDE SPLASH-BLOCK OR DOWNSPOUT BOOT AS REQ'D.
N-17	EXTERIOR WD. STAIR TO MATCH WD. PORCH/DECK. TREATED FRAMING, TYP. RE: DETAILS / STRUCT.
N-27	AERITAS HERITAGE TONGUE AND GROOVE DECKING INSTALLED OVER DOUBLE SLEEPERS WHERE REQ'D (JOIST DROPPED 3", RE: STRUCT.) SLOPE NEW DECKING TO DRAIN (1/4 OVER 1' MIN.) PROVIDE ICE AND WATER SHIELD AND FLASHING AS REQ'D. RE: DETAILS

Energy Co	ode Compliance Summary IECC 2021	CLIMATE ZONE 2A FOR ORLEANS PARISH
	COMPLIANCE METHOD	CHECK
PRESCRIPTI	IVE	✓
RESCHECK (<u>HTTP://WW</u>	W.ENERGYCODES.GOV/RESCHECK)	
COMCHECK (<u>HTTP://WW</u>	W.ENERGYCODES.GOV/COMCHECK)	
	BUILDING AREA	VALUE
TOTAL AREA	A (SQ FT) OF CONDITIONED SPACE	4477
	INSULATION VALUES (R402)	ENTER R VALUE
CEILNG/ROC	DF	R-38
WALLS		R-13
BASEMENT		/ N/A
FLOOR		/ R-13
SLAB		/ N/A
CRAWLSPAC	CE	/ N/A
	HEATING EQUIPMENT	EFFICIENCY (BTU'S/RATING)
ELECTRIC	TBD. SEE GENERAL NOTE 1 BELOW.	TBD. SEE GENERAL NOTE 1 BELOW.
GAS	TBD. SEE GENERAL NOTE 1 BELOW.	TBD. SEE GENERAL NOTE 1 BELOW.
	COOLING EQUIPMENT	EFFICIENCY (BTU/SEER)
	TBD. SEE GENERAL NOTE 1 BELOW.	/ GREATER THAN OF EQUAL TO 10 HSPF/16 SEER AIR SOURCE HEAT PUMP GREATER THAN OR EQUAL TO 3.5 COP GROUND SOURCE HEAT PUMP
	FENESTRATION U VALUE	U-VALUE
	.40 MAX	
	FENESTRATION SHGC	SHGC
	.25 MAX.	
	SKYLIGHT U VALUE	U-VALUE
	ES:	to be determined by sub-contractor according to Heat Load/Manual J calculations

PROJECT / CONTR

PROJECT DESCRIPTION EXISTING MULTI FAMILY CONVERTED INTO SMF PLEX. 3 NEW UNITS ON 50% DEMO OF EXISTIN 50% DEMO OF SIDES A FRONT FACADE TO RE THROUGHOUT. NEW FINISHES AND FIXTURES THROUGHTOUT

ADDITION / STRUCTURAL RENO

SFM, LEVEL OF ALTERATION

7229 ZIMPLE ST NEW ORLEANS LA 70118 JS@NDVRPARTNERS.COM

ZACH SMITH CONSULTING & DESIGN 1000 S NORMAN C FRANCIS PKWY NEW ORLEANS, LA 70125 ZACH@ZACHSMITHCONSULTING.COM

MEP ENGINEER

STRUCTURAL/CIVIL ENGINEER AP DESIGN GROUP JOSHUA JUNEAU, PE JJUNEAU@AP-ENG.COM

PROJECT INFORMATION

- CONSTRUCTION DOCUMENTS. COLUMNS, AND FACES OF EXISTING WALLS. REPRESENTATIVE. STORAGE.
- CONFLICTS OR DISCREPANCIES.
- **GENERAL NOTES PROJECT**

	SHEET LIST			
	Sheet Issue	Current	Current	Current Revision
Sheet Name	Date	Revision	Revision Date	Description
EXIST & PROPOSED	1.28.2025			
NS - EXISTING/DEMO	1.28.2025			
NS - PROPOSED	1.28.2025			
LEVATIONS - EXISTING/DEMO	1.28.2025			
LEVATIONS - PROPOSED	1.28.2025			
Г	01/16/25			
ION PLANS	01/16/25			

ZONING/CODE INFORMATION

UNIVERSITY AREA DESIGN OVERLAY

NEW LOT B DIMENSIONS: 47' X 120'

HDLC DISTRICT: NOHDLC UPTOWN PARTIAL

IBC/IFC: NFPA: COMMON TERMINOLOGY:

TYPE V-A V (000) PROTECTED COMBUSTIBLE

OVERLAY DISTRICT:

B&B IZD

RESIDENTIAL STR IZD

COMMERCIAL STR IZD

PROPOSED DEVELOPMENT:

CONSTRUCTION TYPE:

OCCUPANCY TYPE:

APPLICABLE CODES:

STORAGE)

YES / YES

IBC: RESIDENTIAL (R-2)

SPRINKLERED / FIRE ALARM:

ZONING DISTRICT

ZONING DISTRICT: HU-RD2 HISTORIC URBAN TWO-FAMILY RESIDENTIAL

NON-COMMERCIAL SHORT TERM RENTAL SPECIAL EXCEPTION INTERIM

UNIVERSITY AREA OFF-STREET PARKING OVERLAY DISTRICT

NFPA: RESIDENTIAL, GROSS SF: 5863 (INCLUDING UNDER HOUSE

ACT INFORMATION

N
Y BUILDING
A AFFORDABLE 4-
REAR. LESS THAN
G ROOF, LESS THAN
ND REAR. EXISTING
MAIN. NEW MEP
NISHES AND FIXTURE

 2021 IBC WITH NEW ORLEANS CODE ADOPTIONS (BUILDINGS, STRUCTURES, APPURTENANCES AND PARTS THEREOF BE DESIGNED TO WITHSTAND A BASIC (NOMINAL) WIND SPEED OF 130 MPH. EXPOSURE B, IN ACCORDANCE WITH 2021 IBC, SECTION 1609) 2021 INTERNATIONAL MECHANICAL CODE • 2021 LOUISIANA STATE PLUMBING CODE

- NFPA 70, 2020 NATIONAL ELECTRIC CODE
- 2021 INTERNATIONAL FUEL CODE • 2021 INTERNATIONAL ENERGY CONSERVATION CODE
- 2021 INTERNATIONAL EXISTING BUILDING CODE

THE GENERAL CONTRACTOR IS RESPONSIBLE TO SUPPLY ALL SUBCONTRACTORS WITH CONSTRUCTION DRAWINGS AND SPECIFICATIONS NECESSARY TO BID AND/OR CONSTRUCT THIS PROJECT. TO THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS: ALL CONTRACTORS ARE RESPONSIBLE TO NOTIFY THE ARCHITECT OF ANY ERRORS, OMISSIONS OR DISCREPANCIES PRIOR TO MAKING ANY CHANGES TO THE

ALL DIMENSIONS ON THE FLOOR PLANS, UNLESS OTHERWISE NOTED, ARE TAKEN FROM INSIDE FACE OF STUDS OF EXTERIOR WALLS, CENTER OF STUDS OF NEW INTERIOR PARTITIONS, FACES OR CENTERLINE OF STRUCTURAL

IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, THE CONTRACTOR WILL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS OF THE JOB SITE, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF WORK. THIS REQUIREMENT WILL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO INSURE THE SAFETY OF THE PUBLIC AND/OR WORK PERSONS ON THE JOB TO PREVENT ACCIDENTS OR INJURY TO ANY PERSON ON, ABOUT OR ADJACENT TO THE PREMISES. THE CONTRACTOR SHALL COMPLY WITH ALL LAWS, ORDINANCES, CODES, RULES AND REGULATIONS RELATIVE TO SAFETY AND THE PREVENTION OF ACCIDENTS. WHETHER OR NOT SPECIFICALLY INDICATED ON THE DRAWINGS, ALL CONTRACTORS SHALL BE RESPONSIBLE FOR

REMOVING OR DEMOLISHING EXISTING CONSTRUCTION (INCLUDING UTILITIES) WHICH WILL INTERFERE WITH NEW PRIOR TO THE SHUT-DOWN OR TYING INTO ANY UTILITY, APPROVAL SHALL BE OBTAINED FROM THE OWNER'S

COORDINATE WITH OWNER'S REPRESENTATIVE THE LOCATION OF CONTRACTOR'S EQUIPMENT AND MATERIAL

THE CONSTRUCTION DRAWINGS CONTAIN INFORMATION FOR MULTIPLE CONTRACTORS. OWNER PROVIDED AND INSTALLED ITEMS ARE SHOWN FOR INFORMATIVE PURPOSES. THE GENERAL CONTRACTOR SHALL VERIFY OWNER PROVIDED AND INSTALLED ITEMS AND COORDINATE INSTALLATION WITH OWNER'S REPRESENTATIVE TO AVOID

CONTRACTOR SHALL PROVIDE AND INSTALL ALL MATERIALS IN ACCORDANCE WITH ALL LOCAL, STATE, AND FEDERAL ALL PERMIT FEES SHALL BE PAID BY CONTRACTOR.


CONTRACTOR SHALL BE RESPONSIBLE FOR AND PAY FOR ALL UTILITY DEPOSITS, IMPACT FEES AND CONNECTION



ach

/ RENOV/ Ω $\overline{}$ 701 S **ADDITION** '229 Zimpel 3 Orleans LA, Ð Ζ Ω

TION

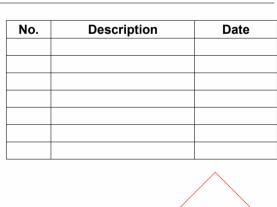

S



TITLE SHEET

PROJECT STATUS 01/16/25


T1.1

Date



	KEYNOTES - SHEET
Key Value	Keynote Text
N-01	EXISTING ROOF RECENTLY REPLACED. PROVIDE BATT INSULATION AT ATTIC CEILING AND CONDITION ATTIC AS REQ'D
N-02	RIDGE VENT AT ROOF, TYP.
N-08	NEW PERVIOUS PAVERS THIS LOCATION
N-09	NEW GRADING/SOD AS REQ'D.
N-12	6" ALUMINUM BAKED HALF ROUND STYLE GUTTERS CONNECTED TO ALUMINUM ENAMEL BAKED 4" CIRCULAR DOWNSF TYP. FOR ALL INSTANCES. PROVIDE SPLASH-BLOCK OR DOWNSPOUT BOOT AS REQ'D.
N-17	EXTERIOR WD. STAIR TO MATCH WD. PORCH/DECK. TREATED FRAMING, TYP. RE: DETAILS / STRUCT.
N-27	AERITAS HERITAGE TONGUE AND GROOVE DECKING INSTALLED OVER DOUBLE SLEEPERS WHERE REQ'D (JOIST DROF TO DRAIN (1/4 OVER 1' MIN.) PROVIDE ICE AND WATER SHIELD AND FLASHING AS REQ'D. RE: DETAILS

OPEN AREA: 31% (1465 SF)

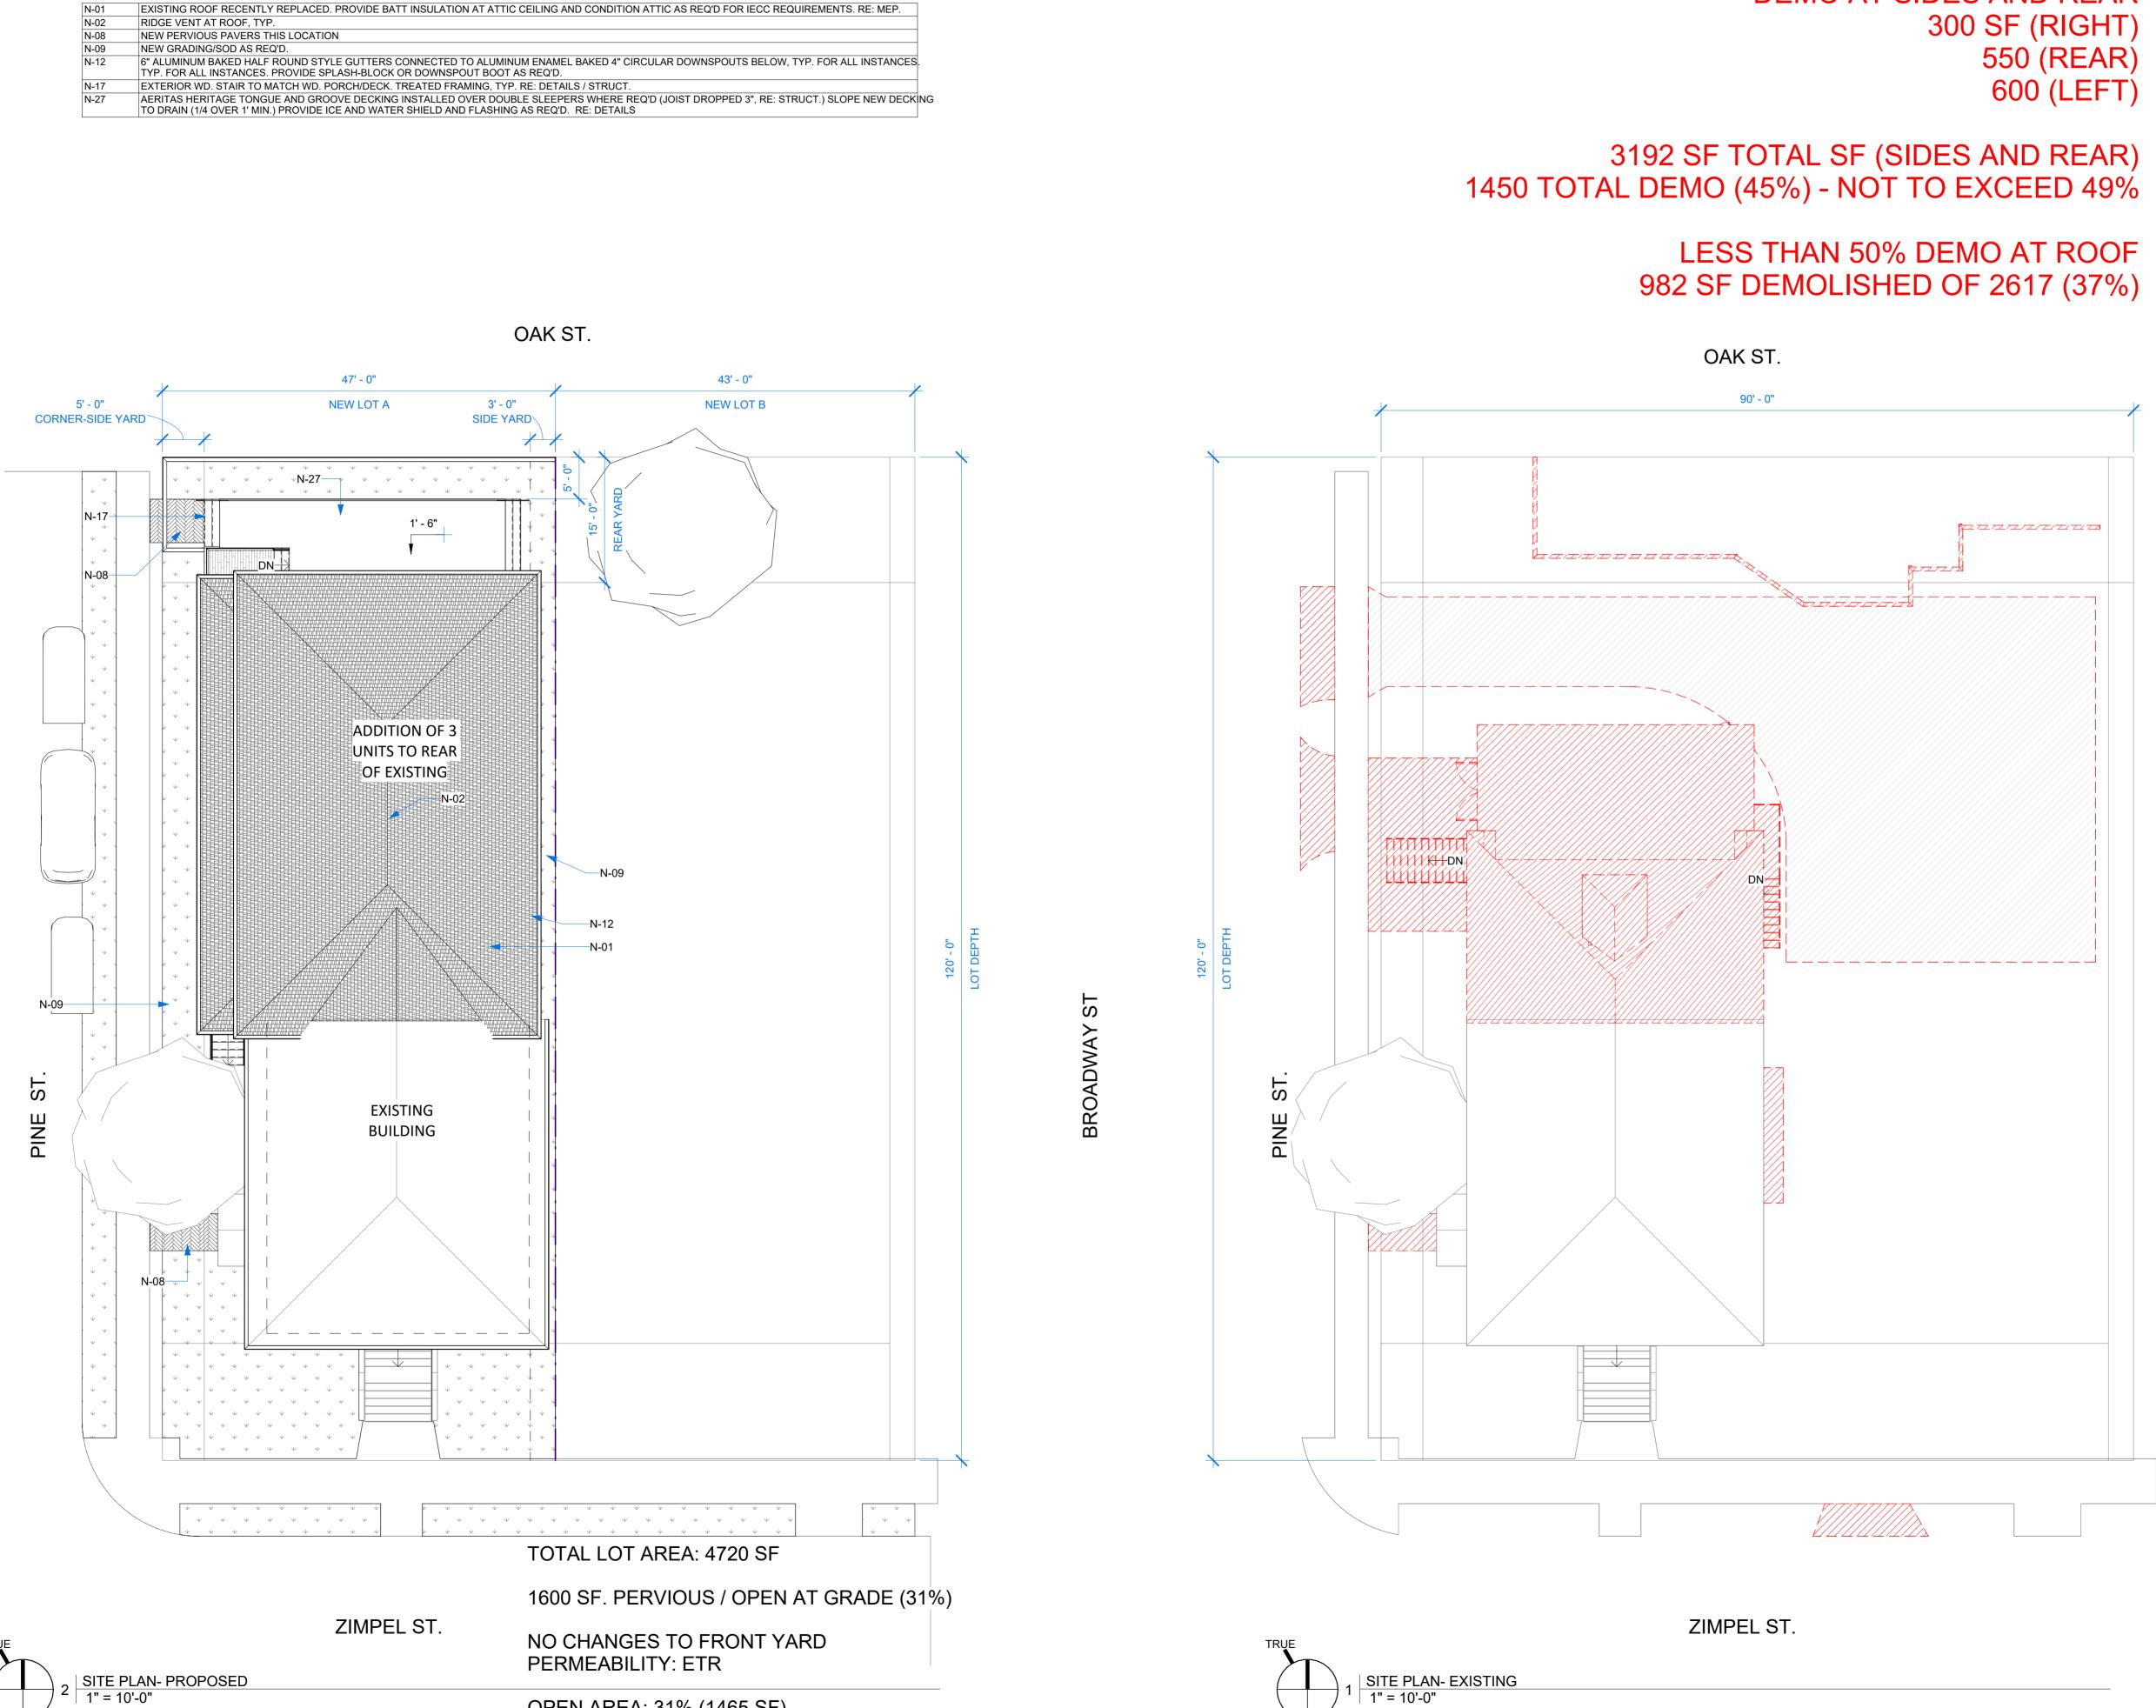





DEMO AT SIDES AND REAR

Nev zach@z S Norm NO 1000 ADDITION / RENOVATION 229 Zimpel St. Orleans LA, 70118

<u>Р</u>

2nd

Nu



New

Ш


Ц

SMF

ഗ

 \cap

BR

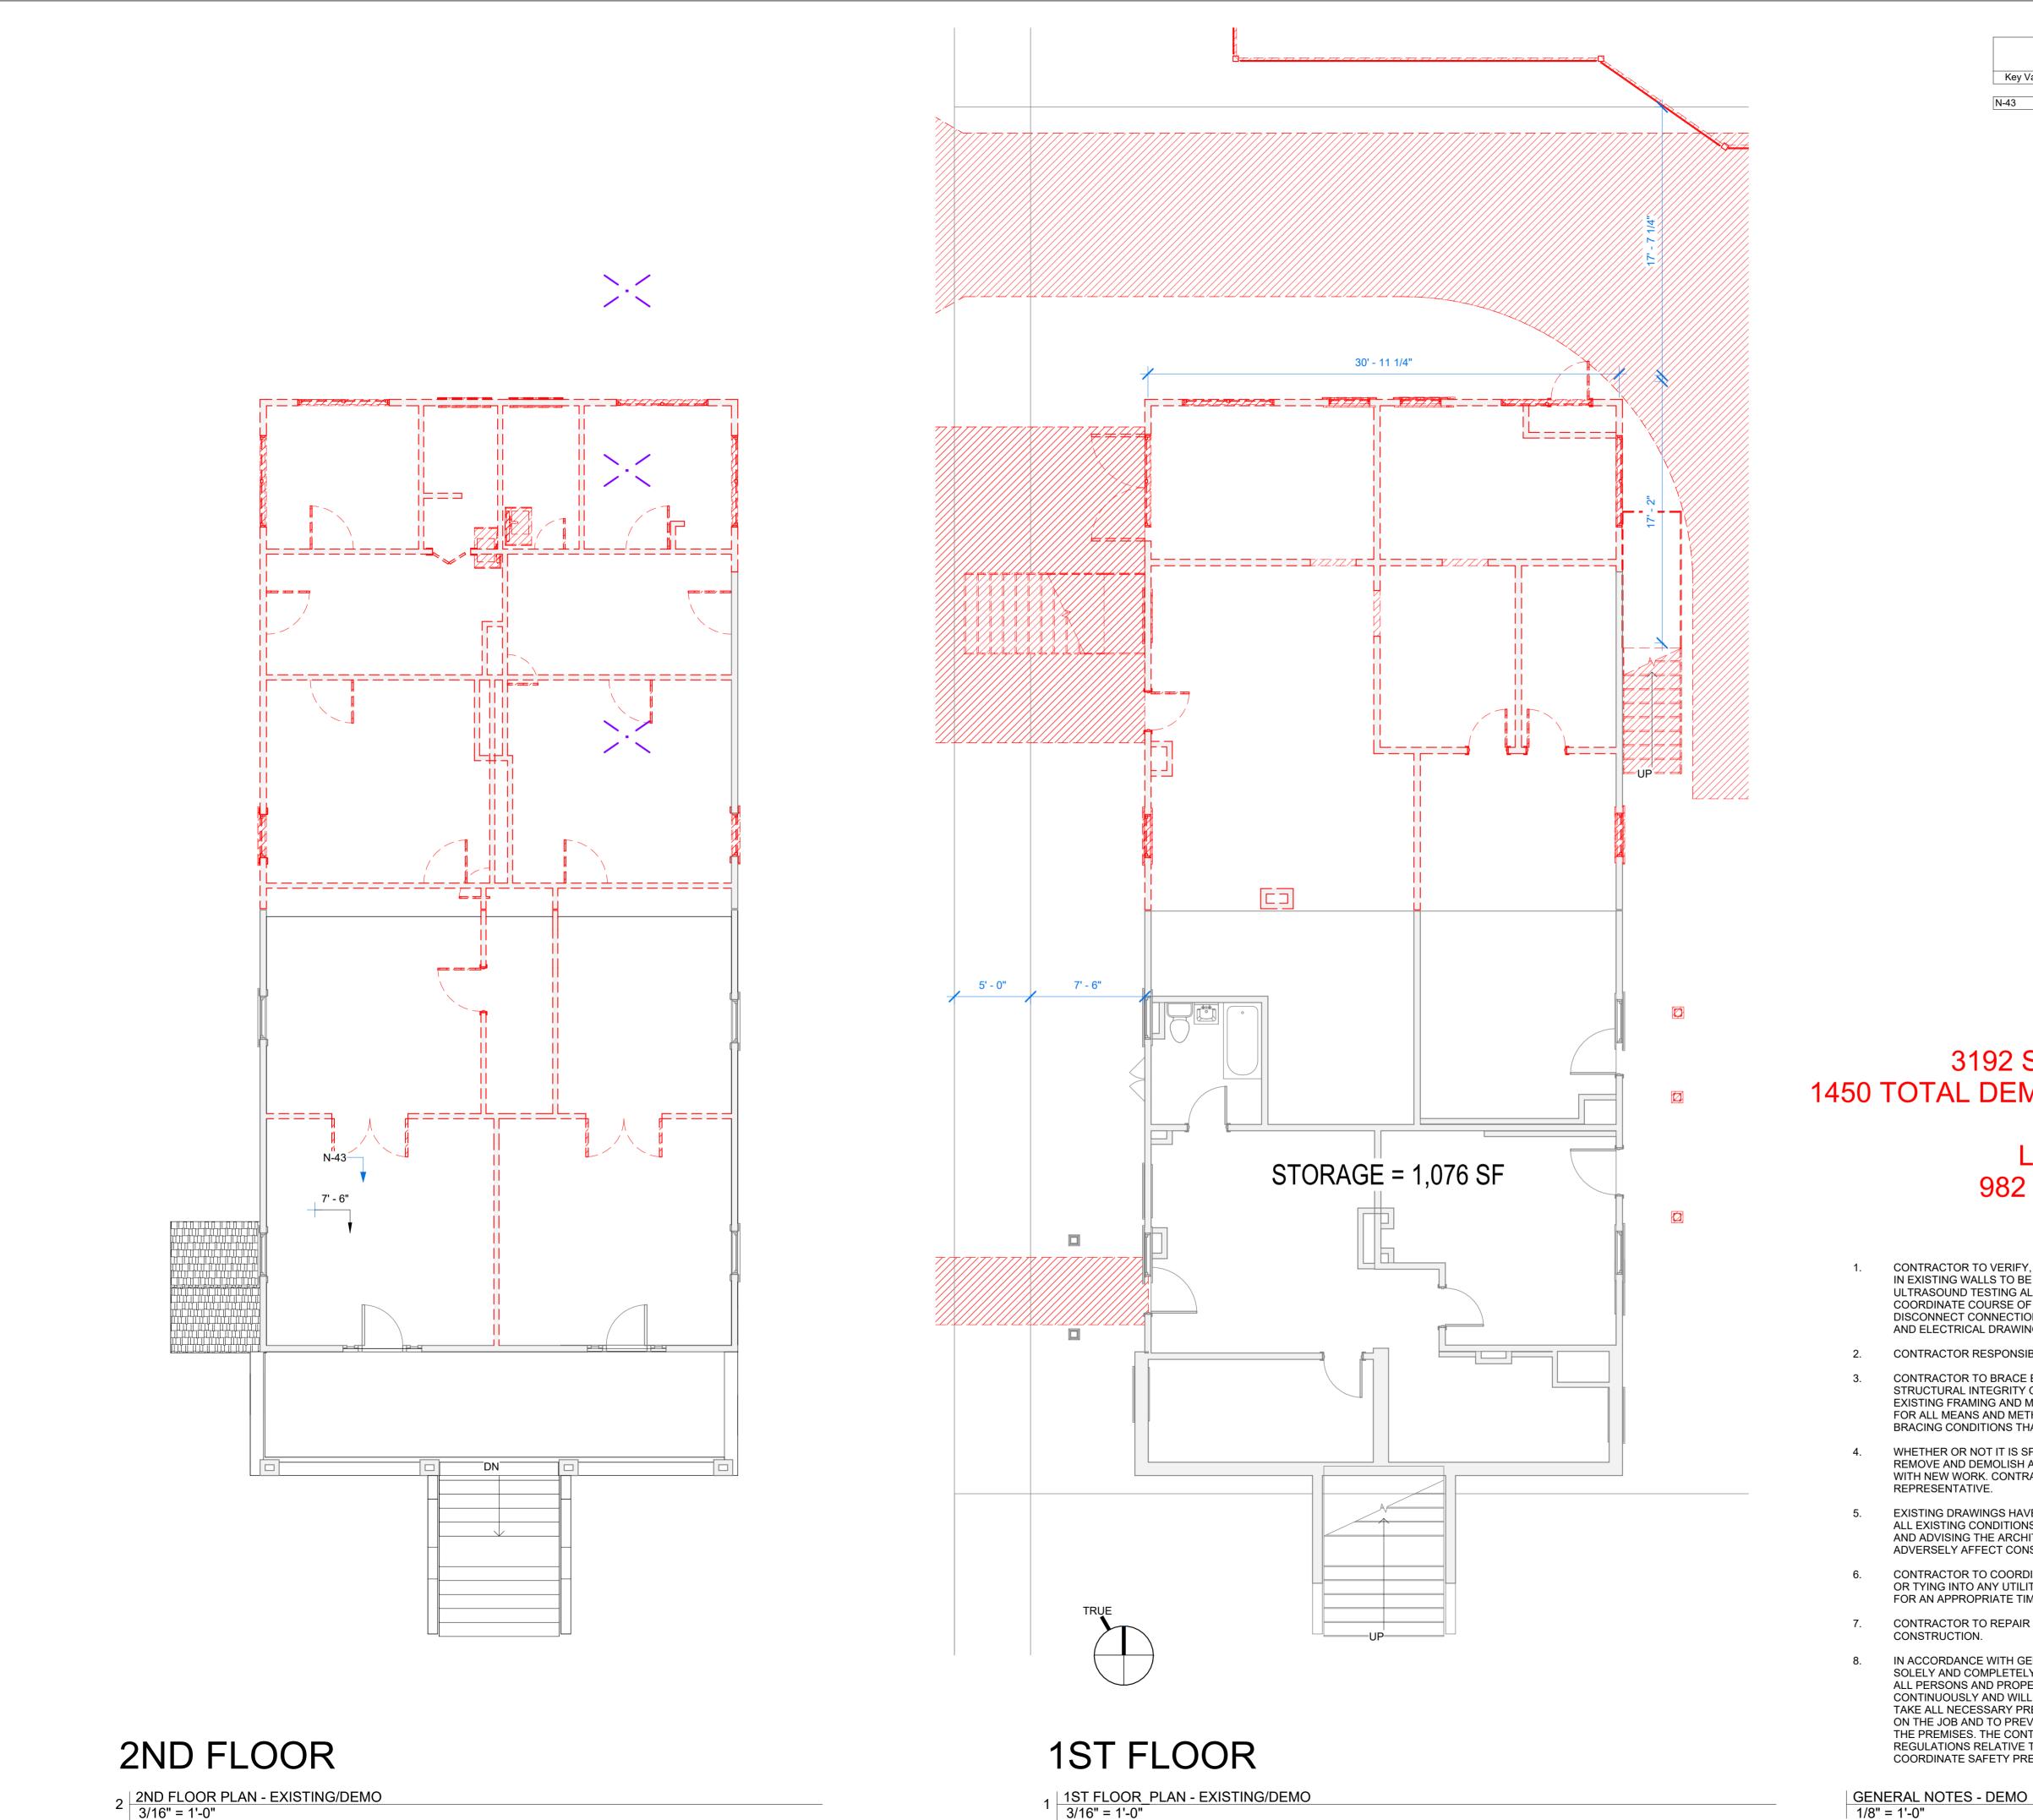


2 2ND FLOOR PLAN - EXISTING/DEMO 3/16" = 1'-0"

	KEYNOTES - SHEET	
Key Value	Keynote Text	
N-43	EXISTING WD. FLOORS TO REMAIN. INFILL WD. FLOORS TO MATCH EXISTING.	
	·	



/ RENOV. 18 $\overline{}$ 20 ADDITION Ð 4 7229 Zimpe Orleans L _____ New Ш Γ

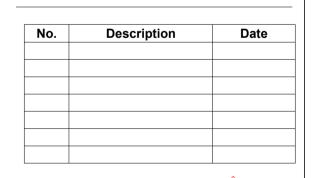

SM





PROJECT STATUS Date

A2.1

1.28.2025

DEMO AT SIDES AND REAR 300 SF (RIGHT) 550 (REAR) 600 (LEFT)

3192 SF TOTAL SF (SIDES AND REAR) 1450 TOTAL DEMO (45%) - NOT TO EXCEED 49%

LESS THAN 50% DEMO AT ROOF 982 SF DEMOLISHED OF 2617 (37%)

CONTRACTOR TO VERIFY, BEFORE DEMOLITION, ANY EXISTING MECHANICAL OR ELECTRICAL SYSTEMS IN EXISTING WALLS TO BE DEMOLISHED AS REQUIRED IN DRAWINGS AND VERIFY THROUGH ULTRASOUND TESTING ALL EXISTING SLAB CONDITIONS IN THESE AREAS. CONTRACTOR TO COORDINATE COURSE OF ACTION WITH OWNER AND ARCHITECT IN FIELD. CLOSE, CAP, AND DISCONNECT CONNECTION TO EXISTING SERVICE AS REQUIRED. REFER TO MECHANICAL, PLUMBING, AND ELECTRICAL DRAWINGS. REFER TO MEP DEMOLITION SHEETS FOR ADDITIONAL INFORMATION.

CONTRACTOR RESPONSIBLE FOR DEMOLITION OF INDICATED WALLS & ASSOCIATED MATERIALS.

CONTRACTOR TO BRACE EXISTING FRAMING AND STRUCTURE AS REQUIRED TO MAINTAIN STRUCTURAL INTEGRITY OF EXISTING AND TO PREVENT COLLAPSE DURING CONSTRUCTION. PROTECT EXISTING FRAMING AND MATERIALS AS NEEDED DURING CONSTRUCTION. CONTRACTOR RESPONSIBLE FOR ALL MEANS AND METHODS OR BRACING. COORDIANTE WITH ENGINEER AS NEEDED FOR SPECIAL BRACING CONDITIONS THAT MIGHT BE NECESSARY DURING DEMO/CONSTRUCTION.

WHETHER OR NOT IT IS SPECIFICALLY INDICATED ON THE DRAWINGS, THE CONTRACTOR SHALL REMOVE AND DEMOLISH ALL EXISTING CONSTRUCTION, INCLUDING UTILITIES, WHICH WILL INTERFERE WITH NEW WORK. CONTRACTOR WILL COORDINATE SAFETY PRECAUTIONS WITH BUILDING


EXISTING DRAWINGS HAVE BEEN PROVIDED BY THE OWNER AND MAY NOT ACCURATELY REPRESENT ALL EXISTING CONDITIONS. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR WALKING THROUGH AND ADVISING THE ARCHITECT OF READILY APPARENT DISCREPANCIES OR CONDITIONS WHICH ADVERSELY AFFECT CONSTRUCTABILITY OF THE WORK.

CONTRACTOR TO COORDINATE LOCATION OF DUMPSTERS WITH THE OWNER. PRIOR TO SHUT DOWN OR TYING INTO ANY UTILITY, APPROVAL SHALL BE OBTAINED FROM THE BUILDING REPRESENTATIVE FOR AN APPROPRIATE TIME.


CONTRACTOR TO REPAIR AS REQUIRED ALL AFFECTED ADJOINING AREAS TO MATCH NEW


IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, THE CONTRACTOR WILL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS OF THE JOB SITE, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF WORK. THIS REQUIREMENT APPLIES CONTINUOUSLY AND WILL NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO INSURE THE SAFETY OF THE PUBLIC AND/OR WORK PERSONS ON THE JOB AND TO PREVENT ACCIDENTS OR INJURY TO ANY PERSONS ON, ABOUT OR ADJACENT TO THE PREMISES. THE CONTRACTOR SHALL COMPLY WITH ALL LAWS, ORDINANCES, CODES, RULES, AND REGULATIONS RELATIVE TO SAFETY AND THE PREVENTION OF ACCIDENTS. CONTRACTOR SHALL COORDINATE SAFETY PRECAUTIONS WITH BUILDING REPRESENTATIVE.







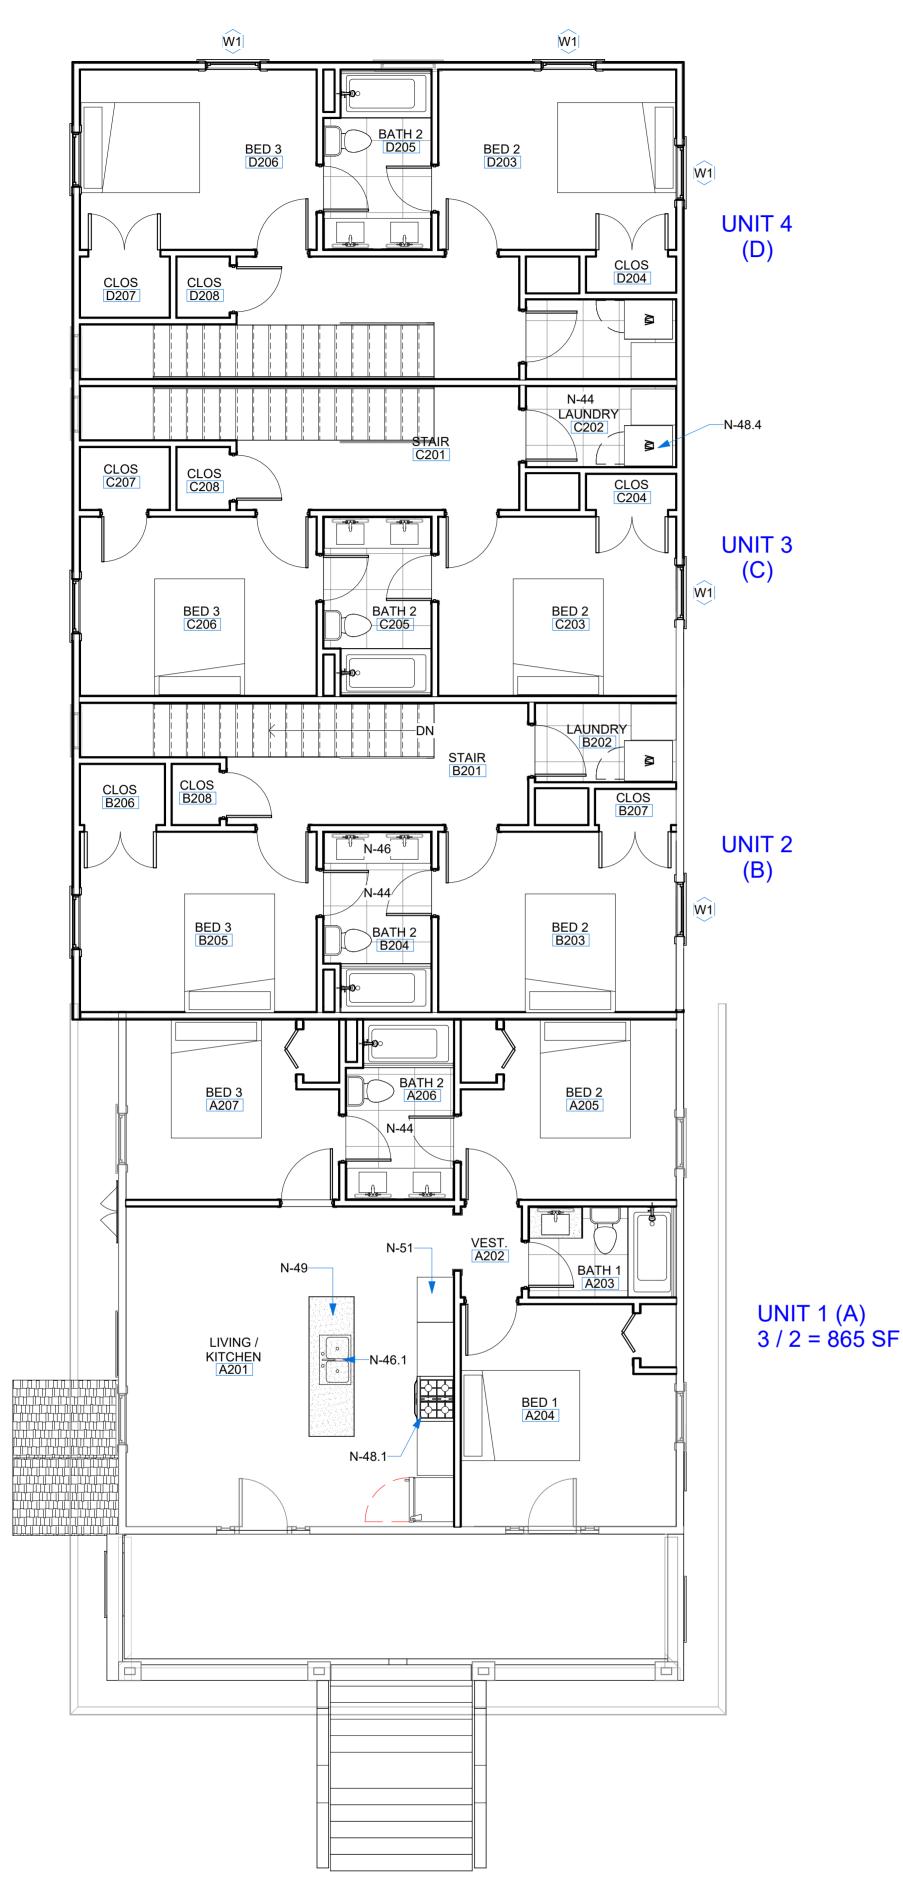

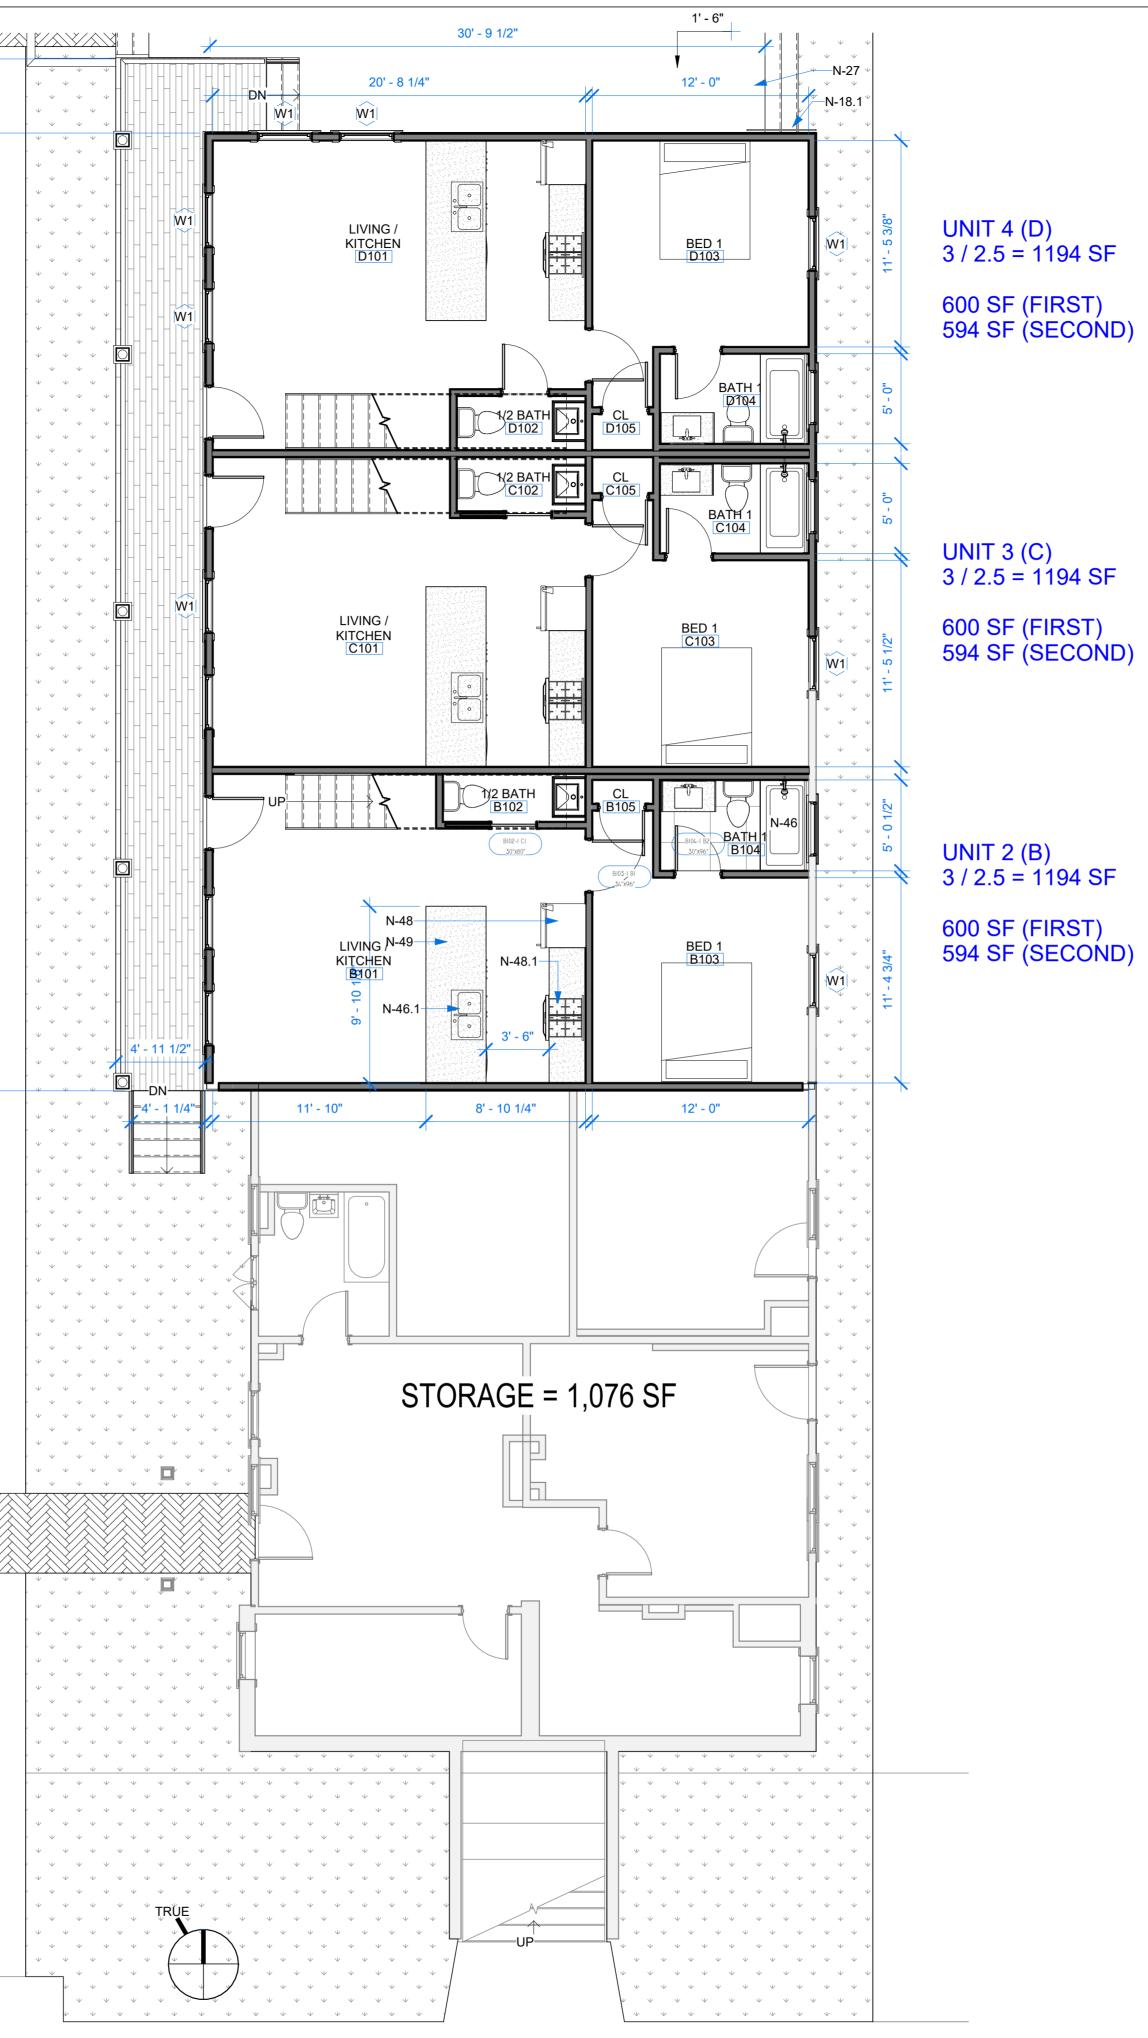

1ST FLOOR BFE 2 3/16" = 1'-0"

	KEYNOTES - SHEET
Key Value	Keynote Text
N-18.1	EXTERIOR WD GUARDRAIL @ 36" A.F.F. PROVIDE BLOCKING (OR DRILL AND EPOXY AT CONCRETE) AS REQ'D FOR MOUNT
N-27	AERITAS HERITAGE TONGUE AND GROOVE DECKING INSTALLED OVER DOUBLE SLEEPERS WHERE REQ'D (JOIST DROPPED 3", RE: STRUCT.) SLOPE NEW DECKING TO DRAIN (1/4 OVER 1 MIN.) PROVIDE ICE AND WATER SHIELD AND FLASHING AS REQ'D. RE: DETAILS
N-44	TILE FLOORS AT THIS LOCATION, CONTRACTOR TO COORDINATE SELECTIONS AND GROUT COLOR WITH OWNER PRIOR TO PURCHASE AND INSTALLATION. PROVIDE CEMENT BACKER AS REQ'D AT SHOWER SURROUNDS AND BASE.
N-46	VANITY, SINK, TUB, TOILET, AND , PLUMBING FIXTURES TO BE CHOSEN BY OWNER; CONTRACTOR TO COORDINATE WITH OWNER / FIXTURE PROVIDER. CONTRACTOR TO LAYOU WORK AND MAKE OWNER AWARE OF ANY CLEARANCE ISSUES PRIOR TO INSTALL.
N-46.1	NEW SINK AT COUNTERTOP. COORDINATE SELECTION WITH OWNER. PROVIDE GARBAGE DISPOSAL AND BUTTON (ELEC OUTLET) AT KITCHEN SINKS, TYP. COORDINATE FAUCET SELECTION WITH OWNER.
N-48	APPLIANCES AT THIS LOCATION TO BE SELECTED BY OWNER, CONTRACTOR TO COORDINATE CONTRACTOR TO PROVIDE PROTECTION AT APPLIANCES AND FLOOR UNTIL FINAL COMPLETION. TO BE TURNED OVER AS NEW, FREE OF BLEMISHES / DENTS.
N-48.1	GAS (OR ELEC.) RANGE OVEN. PROVIDE HOOD EXHAUST AT WALL (OR WITH DOWNDRAFT HOO UNDER JOISTS) GC COORDINATE EXHAUST ROUTING TO EXISTING HOOD VENTS
N-48.4	WASHER AND GAS (OR ELECTRIC) DRYER AT THIS LOCATION; APPLIANCE TO BE SELECTED B OWNER, CONTRACTOR TO COORDINATE PRIOR TO PURCHASE AND INSTALL. PROVIDE DRAIN PAN AT UNDERSIDE OF WASHER. CONTRACTOR TO PROVIDE PROTECTION UNTIL FINAL COMPLETION. TO BE TURNED OVER AS NEW, FREE OF BLEMISHES / DENTS. PROVIDE POWER OUTLET AND EXHAUST AS REQ'D.
N-49	COUNTER-TOP. COORDINATE SELECTION WITH OWNER.
N-51	CABINETRY, STONE, AND FIXTURES TO BE SELECTED BY OWNER; CONTRACTOR TO COORDINATE SELECTIONS & INSTALLATION WITH CABINET, STONE, AND FIXTURE PROVIDERS PROVIDE PROTECTION FOR EACH AFTER INSTALL.

4 UNITS

3X 3 BED / 2.5 BATH @ 1194 SF INTERIOR 1X 3BED / 2 BATH @ 865 SF (EXISTING FOOTPRINT)

4477 SF LIVING TOTAL (INTERIOR)

300 SF NEW SIDE PORCH 330 SF REAR DECK

5077 SF GROSS

250 SF EXISTING FRONT PORCH **1076 EXISTING GROUND FLOOR STORAGE**

SECTION 114000 - KITCHEN APPLIANCES 1. GENERAL

- 1.1 SUMMARY: PROVIDE AND INSTALL KITCHEN APPLIANCES AS SPECIFIED AND SHOWN ON THE DRAWINGS.
- DRAWINGS. 1.2 SUBMITTALS: <u>SUBMIT PRODUCT DATA SHEETS FOR EACH APPLIANCE, INCLUDING</u> <u>MANUFACTURER, MODEL NUMBER, AND PERFORMANCE SPECIFICATIONS. PROVIDE INSTALLATION</u> <u>INSTRUCTIONS AND WARRANTY INFORMATION FOR OWNER APPROVAL PRIOR TO PURCHASING.</u> 1.3 QUALITY ASSURANCE: APPLIANCES TO BE FROM MANUFACTURERS WITH A MINIMUM OF 5 YEARS OF INDUSTRY EXPERIENCE AND POSITIVE REVIEWS. ENSURE APPLIANCES COMPLY WITH RELEVANT SAFETY AND ENERGY STANDARDS, INCLUDING UL, ETL, AND ENERGY STAR® RATINGS. PRODUCTS: SEE INDIVIDUAL KEY NOTES FOR PRODUCTS 2. PRODUCTS: SEE INDIVIDUAL KEY NOTES FOR PRODUCTS 2.1 PERFORMANCE CRITERIA:
- ENERGY EFFICIENCY: ALL APPLIANCES TO MEET OR EXCEED [INSERT SPECIFIC ENERGY EFFICIENCY STANDARDS, E.G., ENERGY STAR® TO MINIMIZE ENERGY CONSUMPTION AND OPERATIONAL COSTS. DURABILITY: APPLIANCES TO BE CONSTRUCTED OF HIGH-QUALITY MATERIALS FOR LONG-TERM RELIABILITY AND RESISTANCE TO TYPICAL WEAR AND TEAR. NOISE LEVELS: APPLIANCES TO OPERATE WITHIN ACCEPTABLE NOISE LEVELS, ENSURING MINIMAL DISTURBANCE IN APARTMENT SETTINGS. [INSERT SPECIFIC NOISE LEVELS IF APPLICABLE, E.G., DISHWASHERS ≤ 50 DBA] EASE OF USE: APPLIANCES TO FEATURE USER-FRIENDLY CONTROLS AND INTERFACES, ENSURING EASE OF OPERATION FOR ALL RESIDENTS.
- 3. EXECUTION 3.1 INSTALLATION: INSTALL APPLIANCES ACCORDING TO MANUFACTURERS INSTRUCTIONS AN LOCAL CODES. VERIFY PROPER OPERATION AND ADJUST SETTINGS AS NEEDED. ALL POWER/WATER CONNECTORS TO BE PROVIDED. 3.2 TESTING: TEST ALL APPLIANCES TO ENSURE THEY ARE OPERATING CORRECTLY AND EFFICIENTLY.
- BATHROOM FAUCET: B.O.D. MOEN DOUBLE HANDLE CENTERSET BATHROOM FAUCET FROM THE BRANTFORD COLLECTION (VALVE INCLUDED). MODEL: 66610 & SINK BASE BOD: 30 IN. W X 19 IN. D X 33 IN. H SINGLE SINK FREESTANDING BATH VANITY IN PEARL GRAY WITH WHITE CULTURED MARBLE TOP
- WATER CLOSET B.O.D. GLACIER BAY, 12 INCH ROUGH IN TWO-PIECE 1.28 GPF SINGLE FLUSH 2 ELONGATED TOILET IN WHITE SEAT INCLUDED
- 3 COUNTERTOP 2CM GRANITE W/BACKSPLASH, OWNER TO CHOOSE COLOR
- (4) REFIGERATOR: B.O.D. LG, 30 IN. W 20 CU. FT. TOP FREEZER REFRIGERATOR W/ MULTI-AIR FLOW AND REVERSIBLE DOOR IN STAINLESS STEEL, ENERGY STAR
- (5) KITCHEN SINK: STANDARD 30" SINGLE BOWL UNDERMOUNT KITCHEN SINK. STAINLESS STEEL.
- REFIFERATOR: B.O.D. FRIGIDAIRE, 30 IN. 5 BURNER ELEMENT FREESTANDING ELECTRIC RANGE IN ⁶ BLACK WITH EVENTEMP AND STEAM CLEAN
- MICROWAVE: B.O.D. GE, 1.6 CU. FT. OVER-THE-RANGE MICROWAVE IN STAINLESS STEEL. RE-CIRCULATING VENT CONFIGURATION.
- RANGE: B.O.D. GE 30 IN. 4 BURNER ELEMENT FREE-STANDING ELECTRIC RANGE IN STAINLESS STEEL ⁸/ W/STAINLESS KNOBS
- CABINETS: B.O.D. PAINTED WOOD WITH A MINIMUM THICKNESS OF ¾ INCH FOR DOORS AND ½ INCH (9) FOR CABINET BOXES. SOFT CLOSERS AND HARDWARE INCLUDED.
- SHOWER: CUSTOM BUILT SHOWER SURROUND. SCHLUTER-SHOWER SYSTEM WITH CEMENT BOARD (10) SURROUND CLAD IN SUBWAY TILE. FACUET: B.O.D. DELTA FOUNDATIONS SINGLE-HANDLE 1-SPRAY SHOWER FAUCET IN CHROME (VALVE INCLUDED). PROVIDE 5/16 IN. TEMPERED GLASS SHOWER DOOR, PANEL, AND RELATED HARDWARE.

PRODUCT BASIS OF DESIGN (B.O.D.) SELECTIONS



Floor 2nd ШO Parkway A 70125 \mathbf{O} isulting. 3748 Francis S Norman C I New Orl zach@zachs 1000

/ RENOVATION St. 70118 ADDITION 7229 Zimpel Orleans LA, Φ Ζ Ω

No.	Description	Date

ဟ



FLOOR PLANS -PROPOSED

PROJECT STATUS 1.28.2025 Date



